

Performance Series Single Channel Current Source Selector Guide


DC / Single Pulse / Continuous Pulse / Dynamic Modes

Max Current (A)	Max Compliance Voltage					Max Power (W)	Min Pulse Width
	50V	100V	200V	300V	400V		
0.5	✓	✓	✓	✓	✓	200	10μs
2	✓	✓	✓	✓	✓	800	10μs
3	✓	✓	✓	✓	✓	1000	10μs
4	✓	✓	✓	✓	✓	1000	10μs
5	✓	✓	✓			1000	10μs
8	✓	✓	✓			1600	10μs
10	✓	✓	✓			1600	10μs
16	✓	✓	✓			3200	10μs
20	✓	✓	✓			3200	10μs
32	✓	✓	✓			6400	10μs
40	✓	✓	✓			6400	10μs
60	✓					3000	10μs

Use this table/selector guide to select your current source and determine your model number. Instructions available on the next page.

How to Use this Current Source Selector Guide

On the previous page, find the columns labeled “Max Current” and “Max Compliance Voltage” to select your current source. To determine your model number, use the model number guide below.

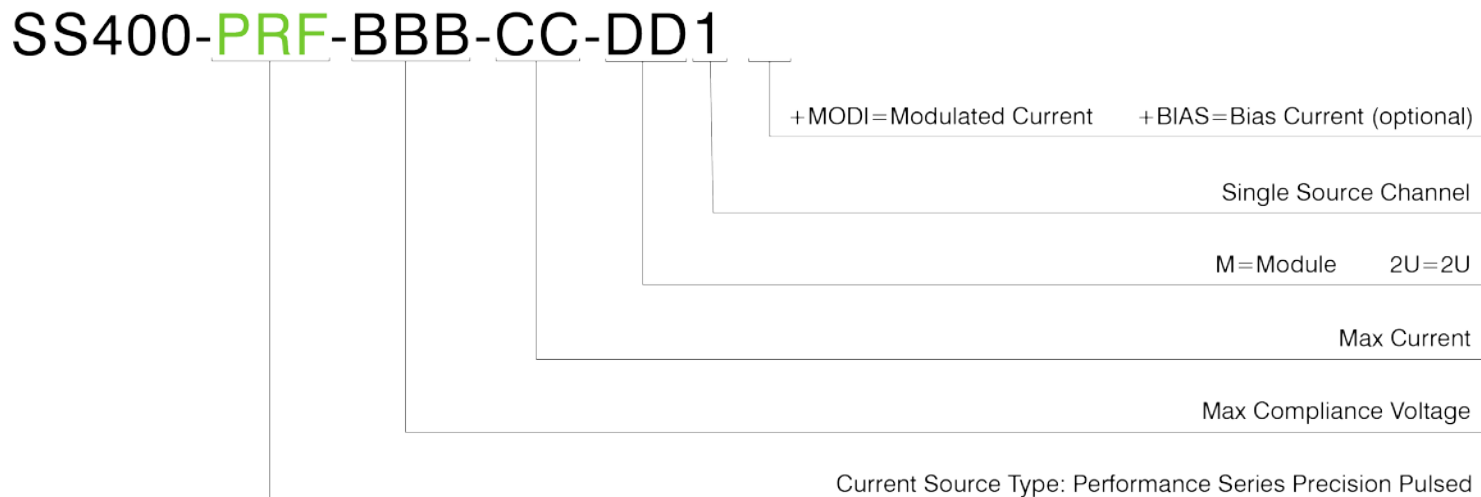

Performance Series Form Factor



If you would like assistance selecting the optimal current source for your application, please contact sales@vektrex.com.