



SpikeSafe SMU: Precision pulses with low noise digitizer simplify generation of IV curves.

- Speed up your test system with precision and accuracy
- Fast pulse with nanosecond rise times keep junction temperature low
- Integrated low noise digitizer with 400V high range
- Measurements synchronized with fast pulse
- Easily generate IV plots using Vektrex developed Control Panel Software
- Integrated BIAS source meets JEDEC ETM for Junction Temperature Measurements

OVERVIEW

SpikeSafe SMU is a precision pulsed source measure unit that precisely sources pulsed current and simultaneously measures voltage. A precision pulsed source measure unit (SMU) has fast rise/fall times, programmable load tuning and on-the-fly pulse width correction. Together, these mean the device has less heating and more uniform heating. The result is unmatched measurement stability - described by one customer as "crazy stable". With Spikesafe protecting your devices, never again be concerned that your SMU will blow up your device, your wafer or itself. Finally, with nanosecond pulse rise times and precision digital triggering, reproducible light measurements for high power devices are possible. Improve your measurements with precision and accuracy and reduce your cost of test.

ACCURATE AND REPEATABLE PULSING - NANOSECOND RISE TIMES

For measurement accuracy, precision pulsing and digital triggering are foundation requirements that the SpikeSafe SMU provides. Digital power enables the SpikeSafe SMU to provide sustained power and highly accurate pulses at full power. Nanosecond rise times and pulse widths (50 μ s, 10 μ s and 1 μ s) offer unparalleled flexibility. With the SpikeSafe SMU, light measurement and other photometric measurement accuracy will be greatly improved enhancing your market position.

EASILY AND RAPIDLY GENERATE IV CURVES

Leverage SpikeSafe SMU fast pulsing and sweep capability to simply and rapidly generate temperature independent IV curves. Vektrex developed Control Panel Software Application delivered with the Spikesafe SMU provides access to all Spikesafe SMU features. Easily Connect, Control, Configure, Monitor, Measure and improve your testing.

4A SpikeSafe SMU Source Measure Unit

CONFIGURATION

1 source channel

DRIVE CAPABILITY

DC, SINGLE PULSE, CONTINUOUS PULSE, MONOPULSE, SWEEP, QCW and BIAS

4A

400V max compliance

MEASURE CAPABILITY

4 wire measure, ranges 10V, 100V and 400V



CRAZY STABLE DIGITIZER

The crazy stable digitizer is amazing. Low noise and precision allow measurement visibility not previously available. High voltage range allows accurate Vf measurement above 10V. One and done – precision and accuracy eliminate need for averaging improving your test system and speeding tests.


APPLICATIONS

- Measurements in constant current and pulsed modes
- Device Characterization
- Short pulses speed binning applications
- Testing to measurement standards
- Calibration Applications
- In-situ junction temperature measurements
- Easily generate IV curves

4A SpikeSafe SMU

Precision pulsing plus a low noise digitizer ensure repeatable precise measurements.

SpikeSafe SMU allows you to see more about your measurements than previously possible. Knowledge is power! A hardware timing system with 1 μ s pulse capability, micro-edge placement, and on-the-fly pulse width adjustment reduces junction heating eliminating shifts in measured parameters caused by heating. Low noise digitizer synchronized to pulses allows V_f measurements to be precisely timed. Measuring $V_f(0)$ is possible. Learn more about your devices with better measurements; possible when using SpikeSafe SMU.

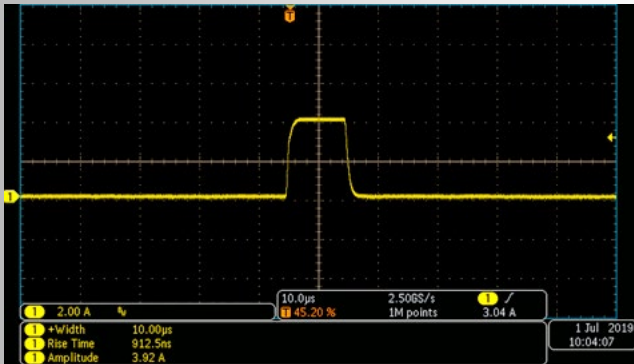

CURRENT SOURCE PERFORMANCE

Modes	DC, Single Pulse, Continuous Pulse, Sweep, Bias
Max Output Current	4A
Max Compliance Voltage	400V
Max DC Output Power	500W
Max Pulsed Output Power	1600W
Output Current Accuracy	0.04% + 175 μ A (Low Range) 0.08% + 1 mA (High Range)

MEASURE PERFORMANCE

Measure Method	4 wire
Ranges	3 Ranges, 10V, 100V and 400V
Input Impedance	1M Ω -1.4M Ω
Coupling	DC Coupled, All Ranges
Max Common Mode	Sense+ or Sense- must be <420VDC from Chassis Ground or Force+ or Force-
ADC Sample Rate	500,000 samples/second, continuous sampling
Digitizer Type	True Differential
Resolution	18 Bits
Programmable Measurement Aperture	2 μ s to 400ms, 500kHz samples boxcar averaged to form measurement points
Measurement Trigger	Software or hardware
Hardware Trigger Edge Polarity	Programmable
Trigger Delay	Programmable 0 to 400ms, 2 μ s resolution
Measurement Points Per Acquisition	1 to 525
Autozero Function	Reduces measurement offset

PULSE PERFORMANCE

Time Base Accuracy	50ppm
Pulse Width Range	Min (1 μ s, 10 μ s, 50 μ s) to 15000s
Pulse Width Resolution	1 μ s (11ns with pulse width offset)
Pulse Width Accuracy	1 μ s (50ns with pulse width offset)
Pulse Period Range	30 μ s-30000s
Duty Cycle Range	0-100%
Pulse Width Jitter	<30ns typical
Rise/Fall Time	200ns to 3 μ s
Sweep Steps	3-10000 (Pulsed Sweep mode)

TRIGGER IN

Signal Type	3.3V logic (5V tolerant)
Polarity	Programmable
Programmable Delay	Programmable delay, 0 μ s to 30s
Delay Programming Resolution	1 μ s

TRIGGER OUT

Signal Type	5V logic, 50 Ω pull-up and open collector outputs
Polarity	Programmable
Trigger Jitter	<10ns typical
Programmable Delay	Programmable delay, 0 μ s to 30s

[Follow this link to access complete specifications for the SpikeSafe SMU.](#)